



A. Reel & Carrier spec. :

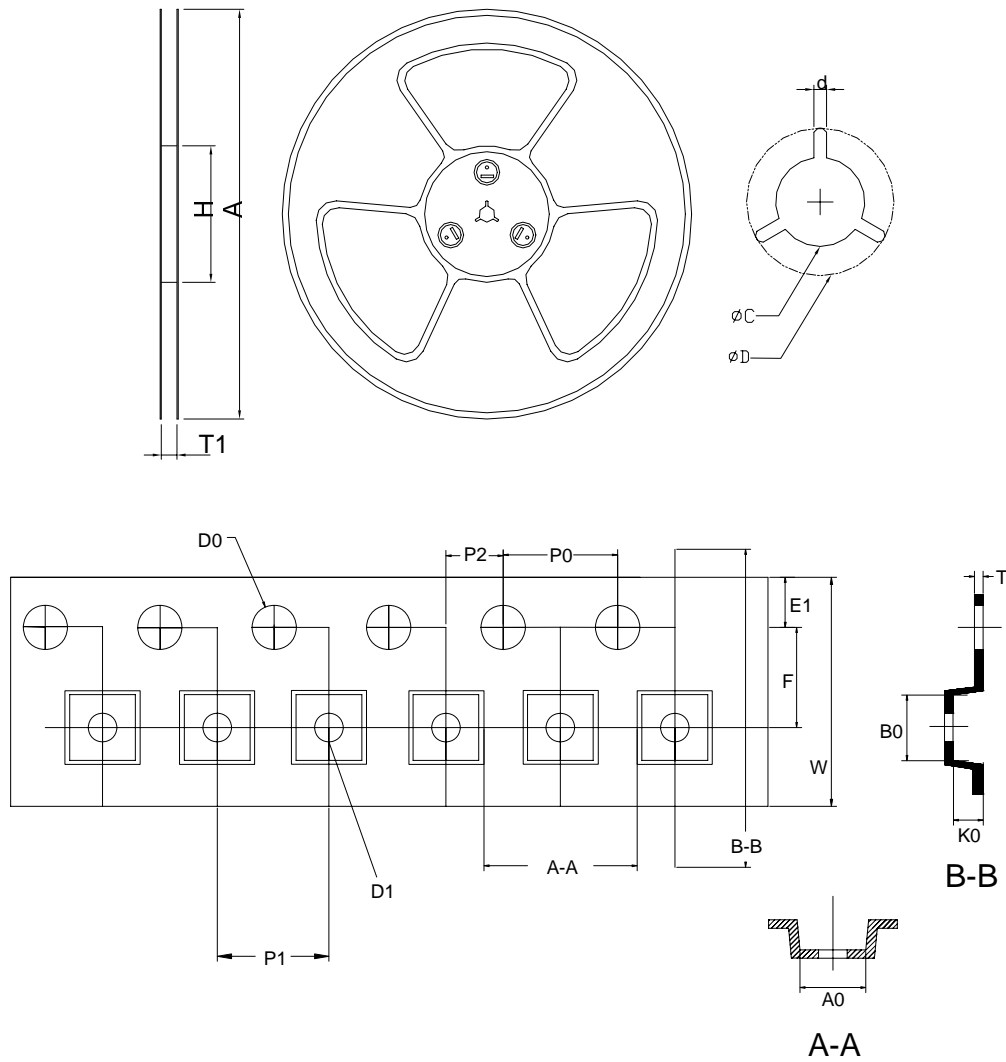

| Application | A | H | T1 | C | d | D | W | E1 | F |
|-------------|------------|-----------|----------|---------------|---------------|-----------|---------------|-----------|----------|
| DFN3x2A-8 | 178.0±2.00 | 60.0±0.50 | 9.0±2.00 | 13.0±0.20 | 2.0±0.20 | 21.0±0.50 | 8.0+0.30-0.10 | 1.75±0.10 | 3.5±0.05 |
| | P0 | P1 | P2 | D0 | D1 | T | A0 | B0 | K0 |
| | 4.0±0.10 | 4.0±0.10 | 2.0±0.05 | 1.5+0.10-0.00 | 1.0+0.25-0.00 | 0.3±0.02 | 3.35±0.10 | 3.2±0.10 | 1.1±0.10 |

B. Taping direction :

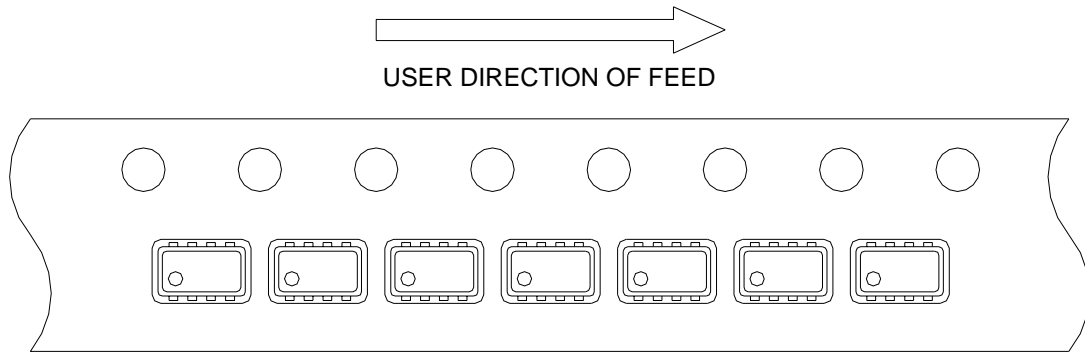

C. Device per reel :

| Package Type | Unit | Quantity |
|--------------|-------------|----------|
| DFN3x2A-8 | Tape & Reel | 3000 |